


The LHCb Outer Tracker: Production & Ageing studies

Kaffeepalaver
MPI-K

Tanja Haas
Physikalisches Institut




4.11.04

Tanja Haas
Physikalisches Institut

1



LHC at CERN

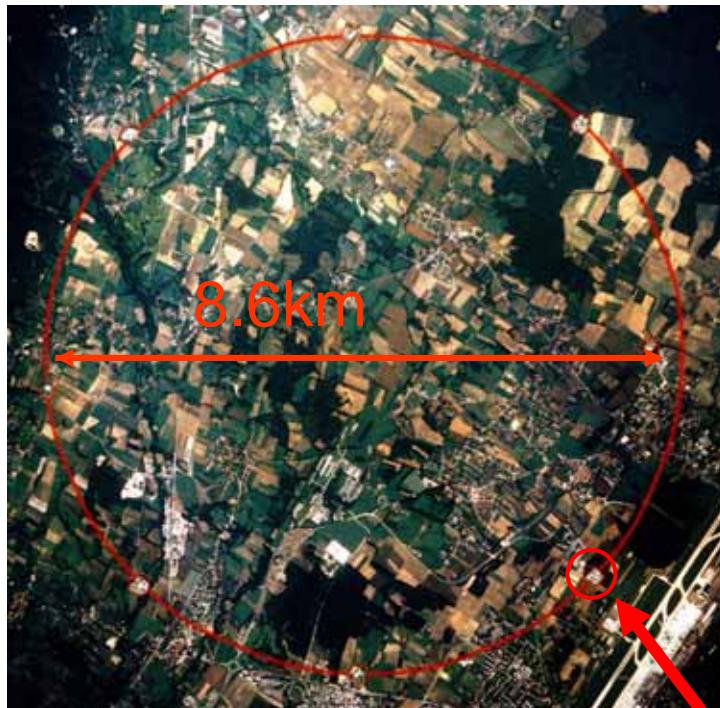


p-p collisions
beam energy 7 TeV

Four experiments:
Atlas, CMS, Alice and
LHCb

First collisions:
2007

LHCb



4.11.04

Tanja Haas
Physikalisches Institut

2




LHCb: Designed to exploit CP violation and rare decays of B-mesons at LHC

$$\sigma_{\text{tot}} = 80 \text{ mb}$$

$$\sigma_{\text{bb}} = 500 \mu\text{b}$$

$\rightarrow 10^{12} b(\bar{b})$ per year


Production mechanism:
Gluon-gluon fusion

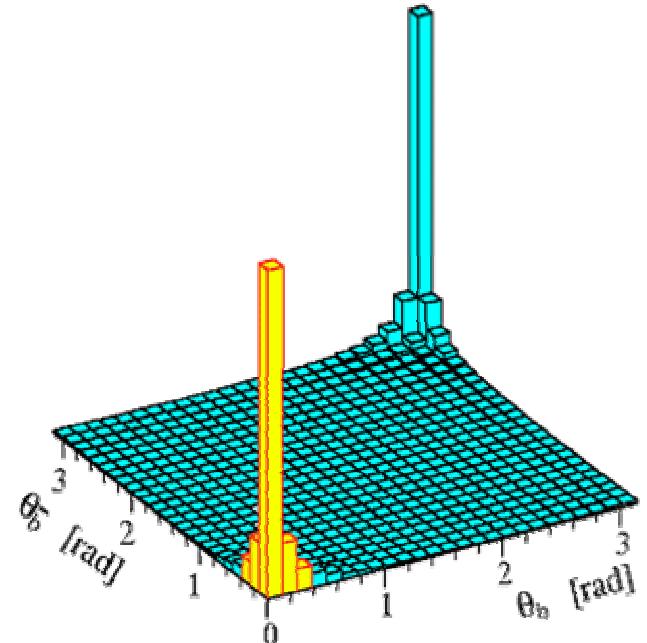

LHCb:

- Single arm forward spectrometer

$$12 \text{ mrad} < \theta < 300 \text{ mrad} (1.8 < \eta < 4.9)$$



4.11.04

Tanja Haas
Physikalisches Institut

3

The LHCb experiment

Particle ID:

RICHES: PID
 K, π separation

Calorimeters:
PID: e, γ, π^0


Muon System

Tracking system:

- VELO:
- primary + displaced vertex
 - impact parameter

Trigger Tracker:
 p for trigger

Tracking Stations:
 p of charged particles

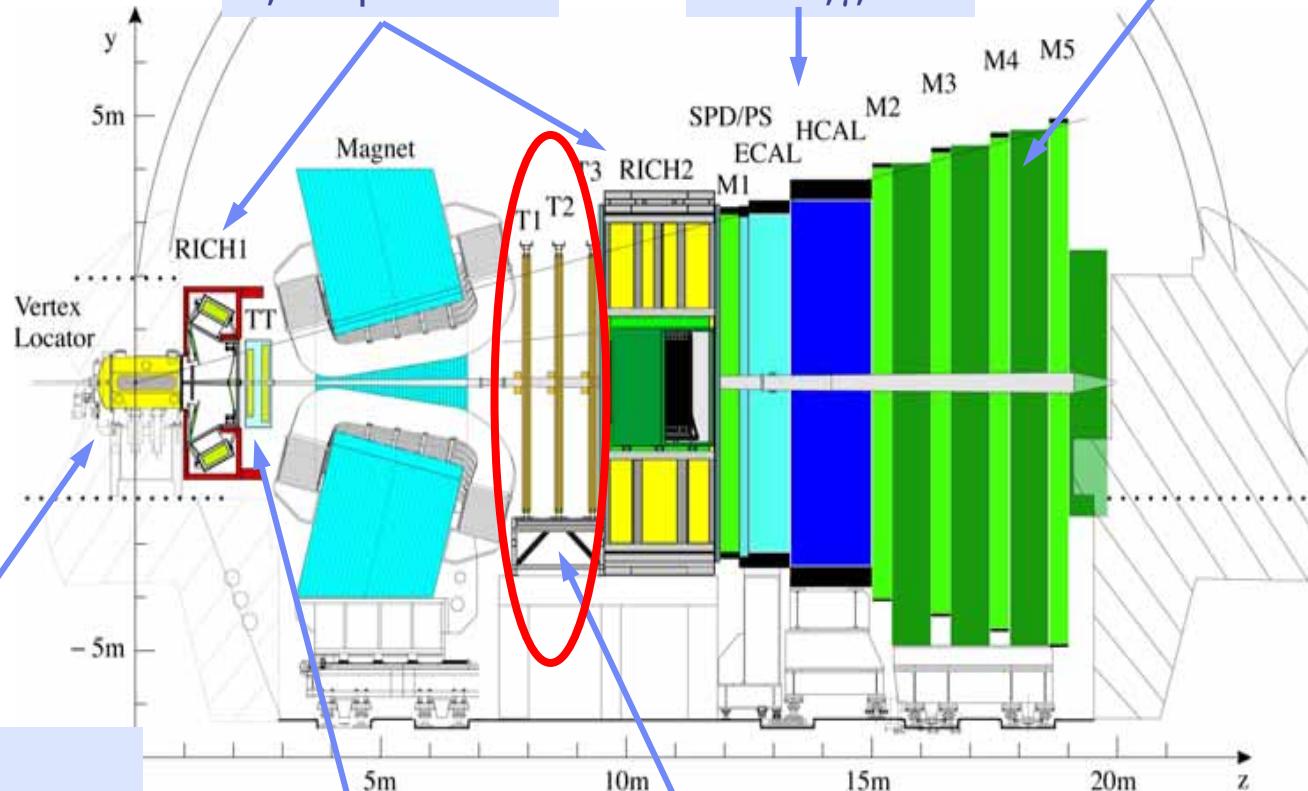


4.11.04


Tanja Haas
Physikalisches Institut

Physics

typical event at LHCb:
(simulation)

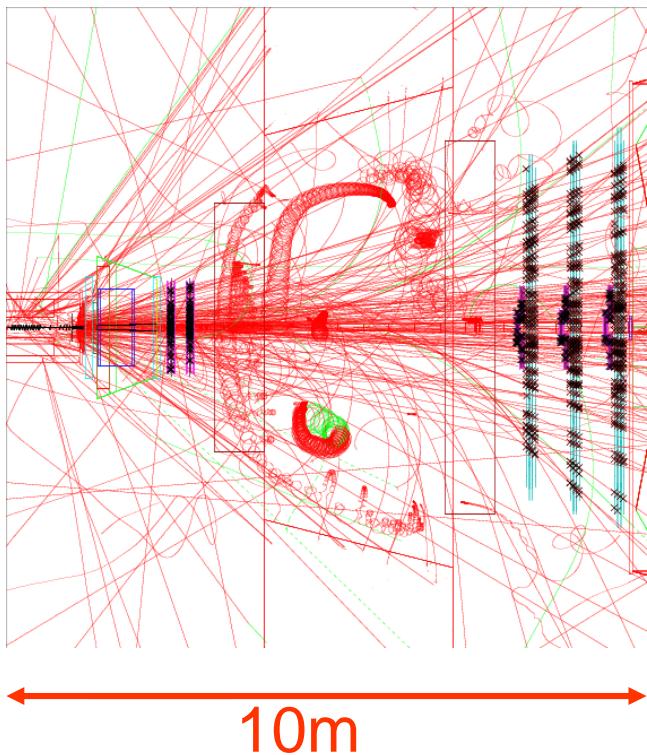

Challenge:
Reconstruct decay vertex
of B-meson,
e.g. $B_s^0 \rightarrow D_s^- K^+$

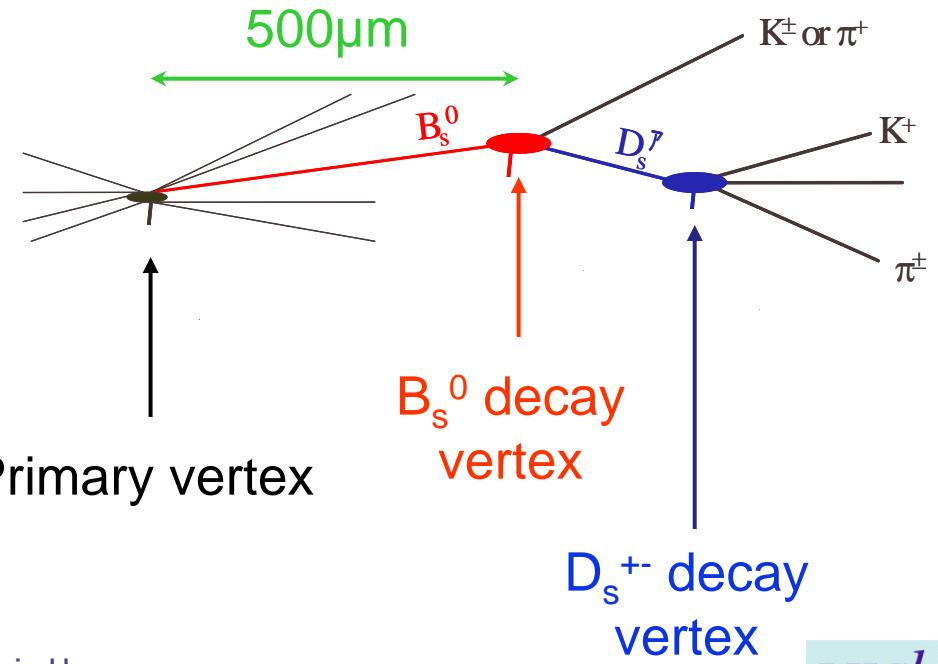


4.11.04

Tanja Haas
Physikalisches Institut

Contributions of the PI to LHCb

1. Construction of ~1/4 of Outer Tracker detector modules.
2. Development and test of TDC chip (OTIS) for drift time measurement.
3. Development and test of optical data transmission.



4.11.04

Tanja Haas
Physikalisches Institut

6



Outer tracker: demands

1. Measurement of momentum

($\delta p/p = 0.4\% @ 20\text{GeV}$)

→ $\sigma_x < 200\mu\text{m}$

2. LHC bunch structure (40 MHz interaction rate)

→ fast charge collection

3. LHC environment

→ rate capability ($\sim 400\text{kHz/cm}^2$)

ageing resistant


4. Pattern recognition

→ Occupancy < 7%



5. Low radiation length

Usage of
Straw tubes



Outer tracker: parameters

3 stations (6m x 5m)

4 planes per station (X/U/V/X)

2 layers of straw tubes
per plane



→ 55.000 straw tubes

137.5 km of straw tubes


→ modular design

264 modules of 5 m x 0.34 m


256 straws of 2.5 m

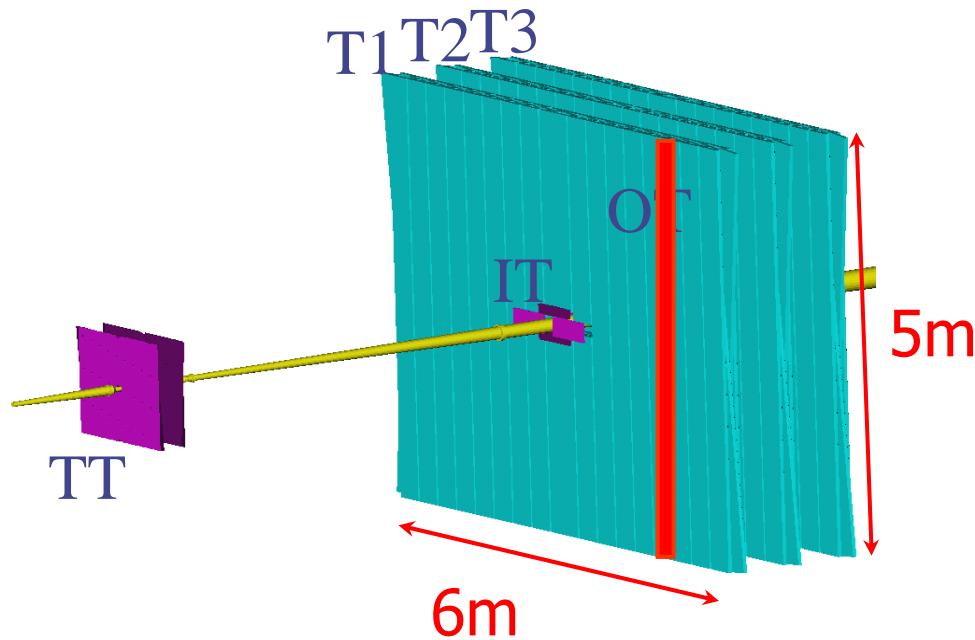

Detector technology: straw tubes

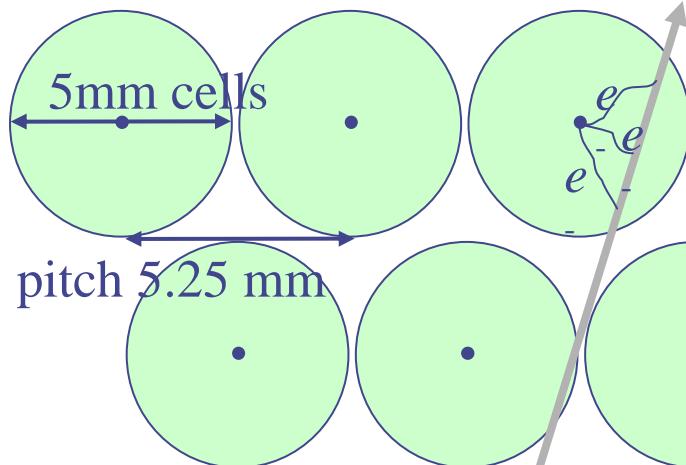

Track

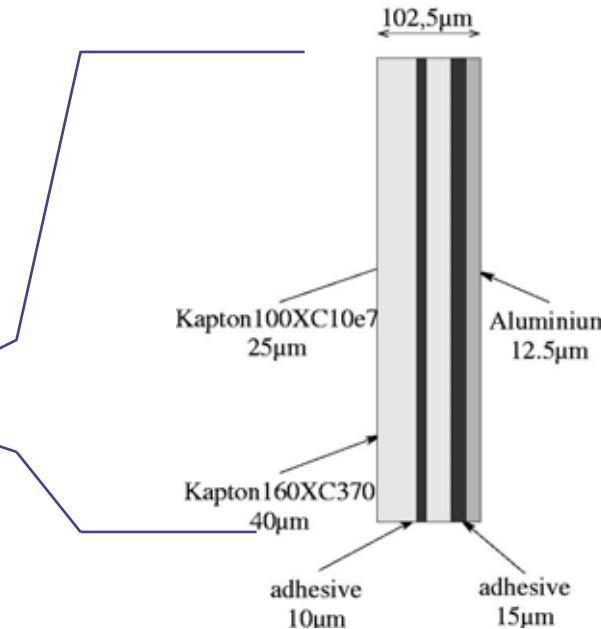

- Inner foil (cathode):
Kapton XC
- Outer foil:
Kapton/Aluminium-laminate
- Anode:
25 μm wire (gold coated tungsten)

Design of detector modules


length : 5m

width: 0.34m

length of straws: 2.5m

2*64 straws per half module


→ 256 straws per module

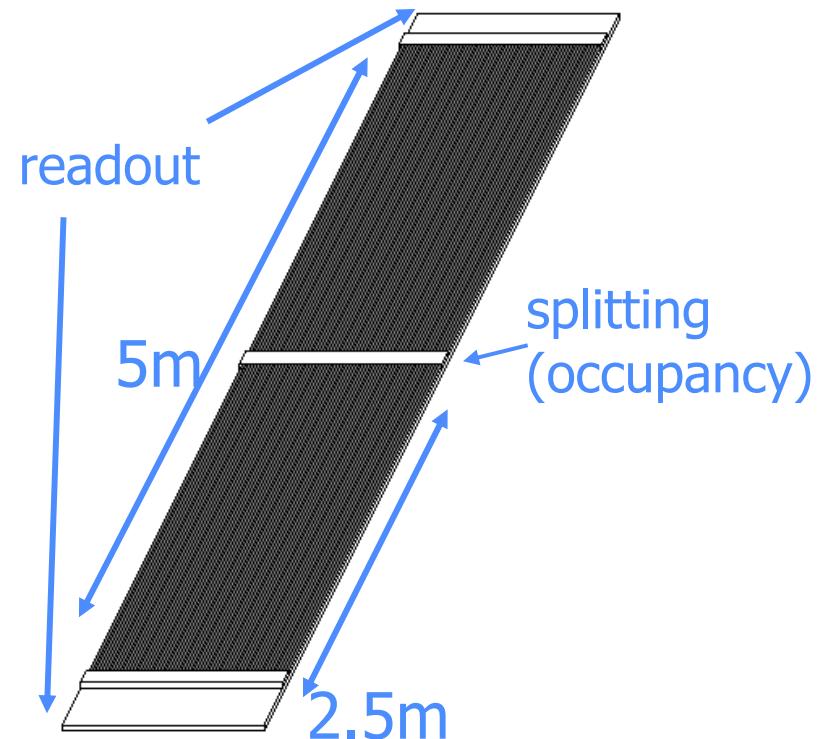

0.34m, 64 straws



Cross section



4.11.04

Tanja Haas
Physikalisches Institut



10



Detector modules I

A. Half modules (one straw layer):

1. Rohacel panels with CF skins, covered with Kapton/Al-laminat
2. PCB's
3. Straws + wire locator and endpieces
4. Wires

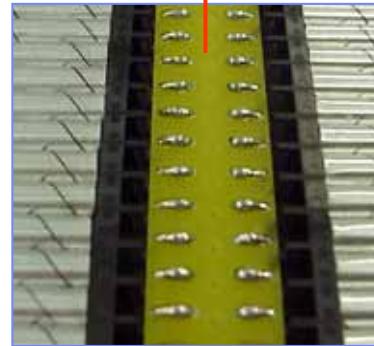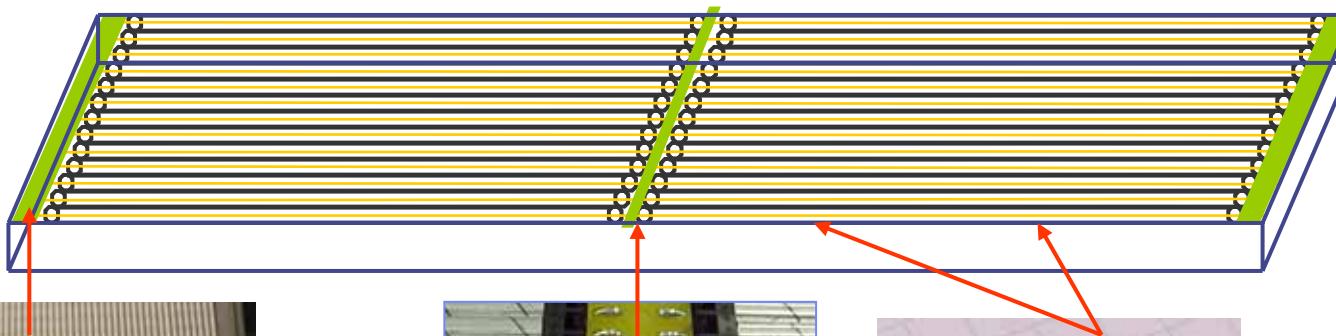

Wire locator
(2x per straw)
and endpieces

Module production



Module production II


Two half modules
+ side walls



gluing




Full module


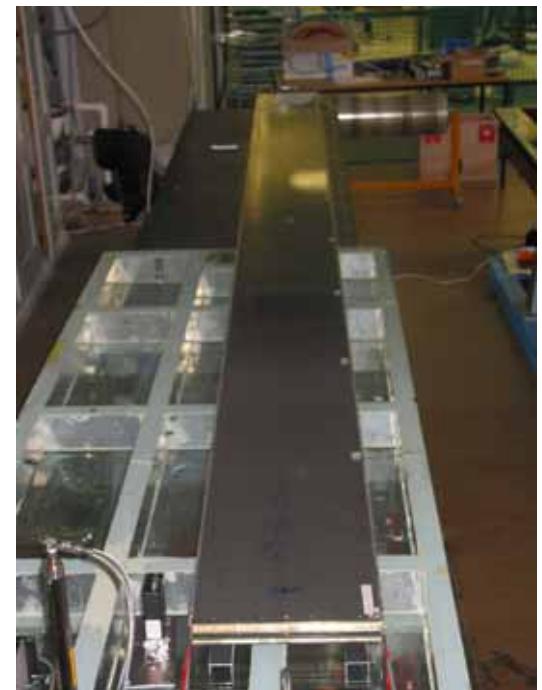


Quality control

Half modules:
HV tests
dark current measurements
wire tension measurements

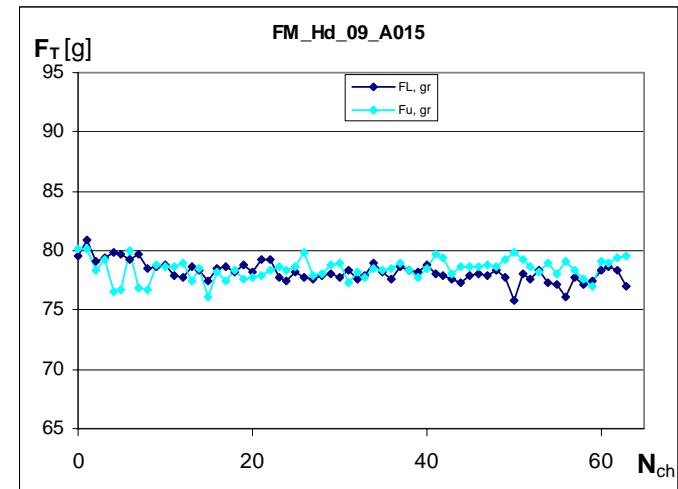


Final modules:
gas tightness
dark current
uniformity of response
(pulse height from ^{55}Fe)

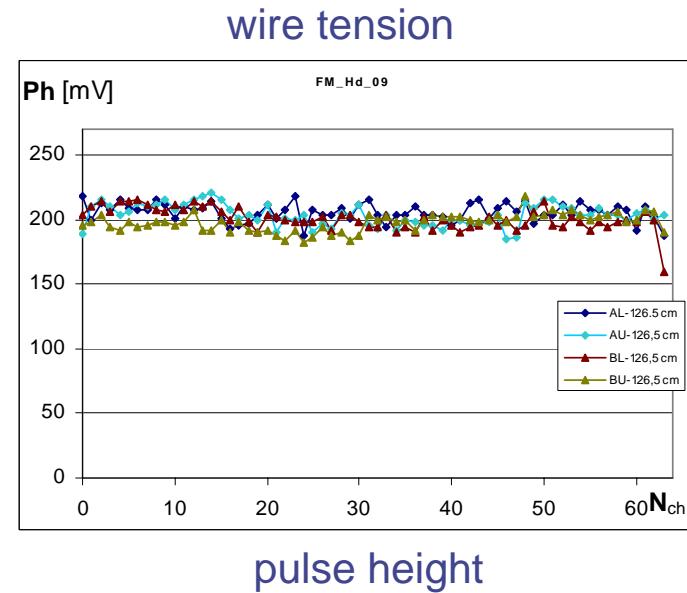

Choice of the counting gas


Requirements to the counting gas

- 1) fast
- 2) good position resolution
- 3) no aging

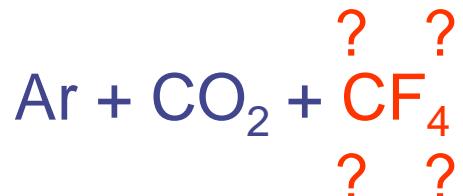

Usage of CF_4 :

Pro: fast




4.11.04

Tanja Haas
Physikalisches Institut

15




Compare the gases

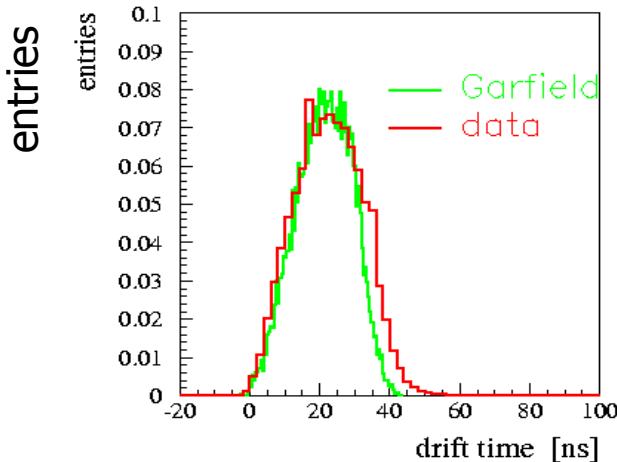

37+/-1 ns
for 95%
of the data


Interaction every 25 ns
→ Bunch crossing rate
BX rate = 40MHz

ArCO₂CF₄ (75:10:15):
fast gas
readout within 2 BX

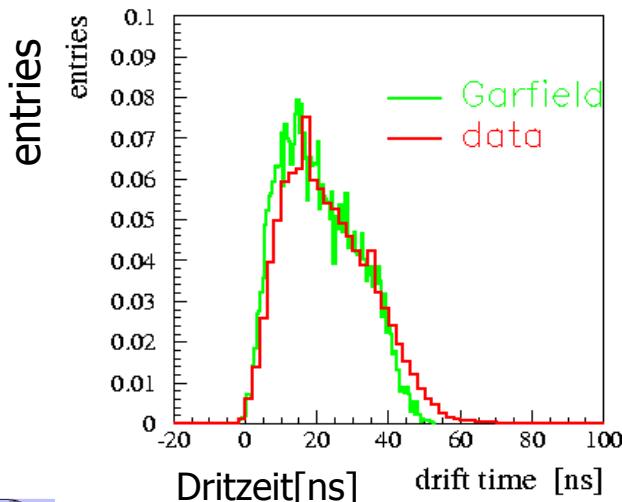

44+/-1 ns
for 95%
of the data

ArCO₂ (70:30)
readout within 3 BX



4.11.04

Tanja Haas
Physikalisches Institut


16



Choice of the counting gas

Requirements to the counting gas

- 1) fast
- 2) good position resolution
- 3) no aging

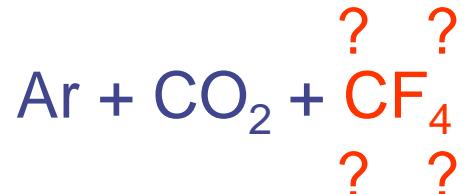


Usage of CF_4 :

Pro: fast

Contra: electronegative

→ degradation of spatial resolution

??? Impact on aging ???



Ageing of gas detectors

Long term operation of gas detectors:


Possible degradation of detector performance,
induced by radiation

Symptoms:

- gain loss → reduced efficiency
- degradation of energy and spatial resolution
- dark currents


caused by:

- deposits on anode and cathode
- etching of wire (wire rupture!)




Examples for aged detectors

New wire


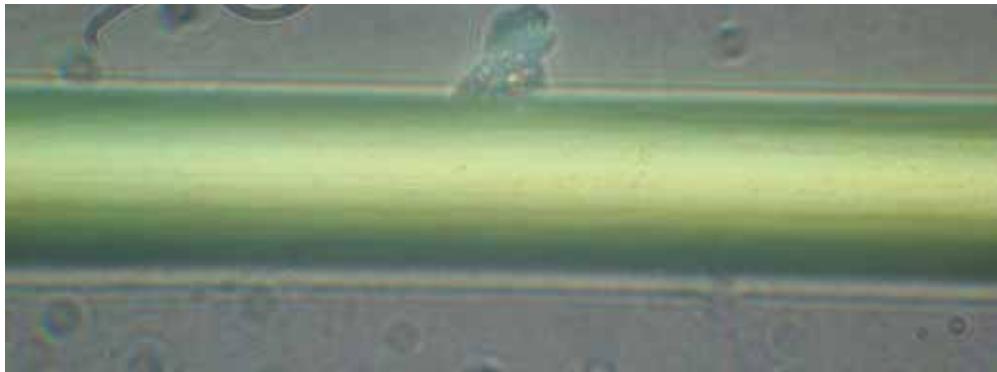


Deposits on wire

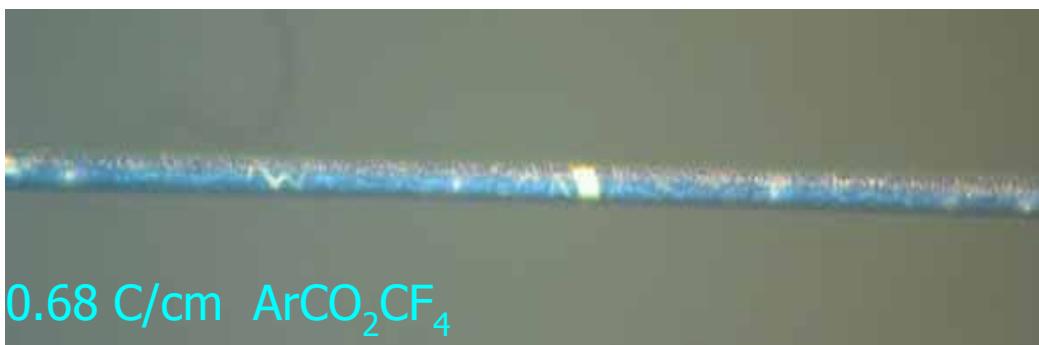

Wire etching
and rupture

0.60 C/cm
 ArCO_2CF_4

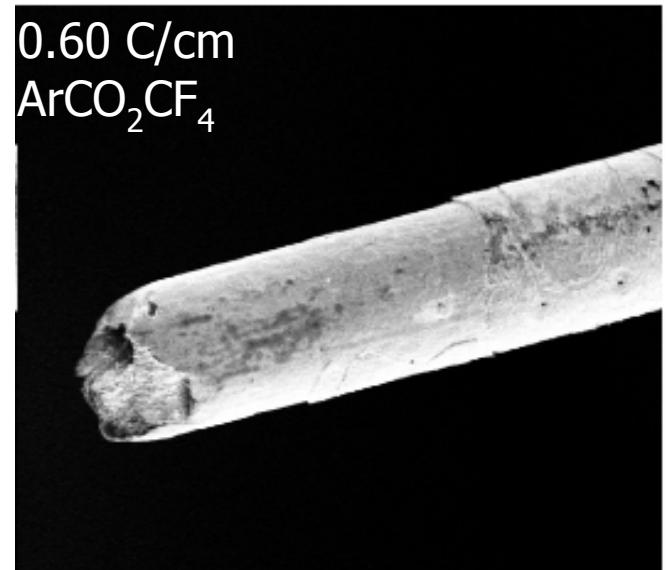

4.11.04

Tanja Haas
Physikalisches Institut

19




Parameters affecting ageing

1. Accumulated charge per wire length
(2 C/cm for 10 years operation at LHCb)
2. Intensity
3. Primary ionisation
4. Irradiated area
5. Counting gas
6. Impurities (e.g. Si) !

Precautions:

Careful choice of operating parameters
Purity of complete system




Comparision of ionising particles

	minimal ionising particles	^{55}Fe (5.9keV)	γ (9keV) X-ray	protons @ Bragg- Peak
number of primary ionisations	ca. 35	ca.220	ca. 330	ca. 3500



Motivation for tests at the MPIK



4.11.04


Tanja Haas
Physikalisches Institut

21



X-ray tests

Set-up:

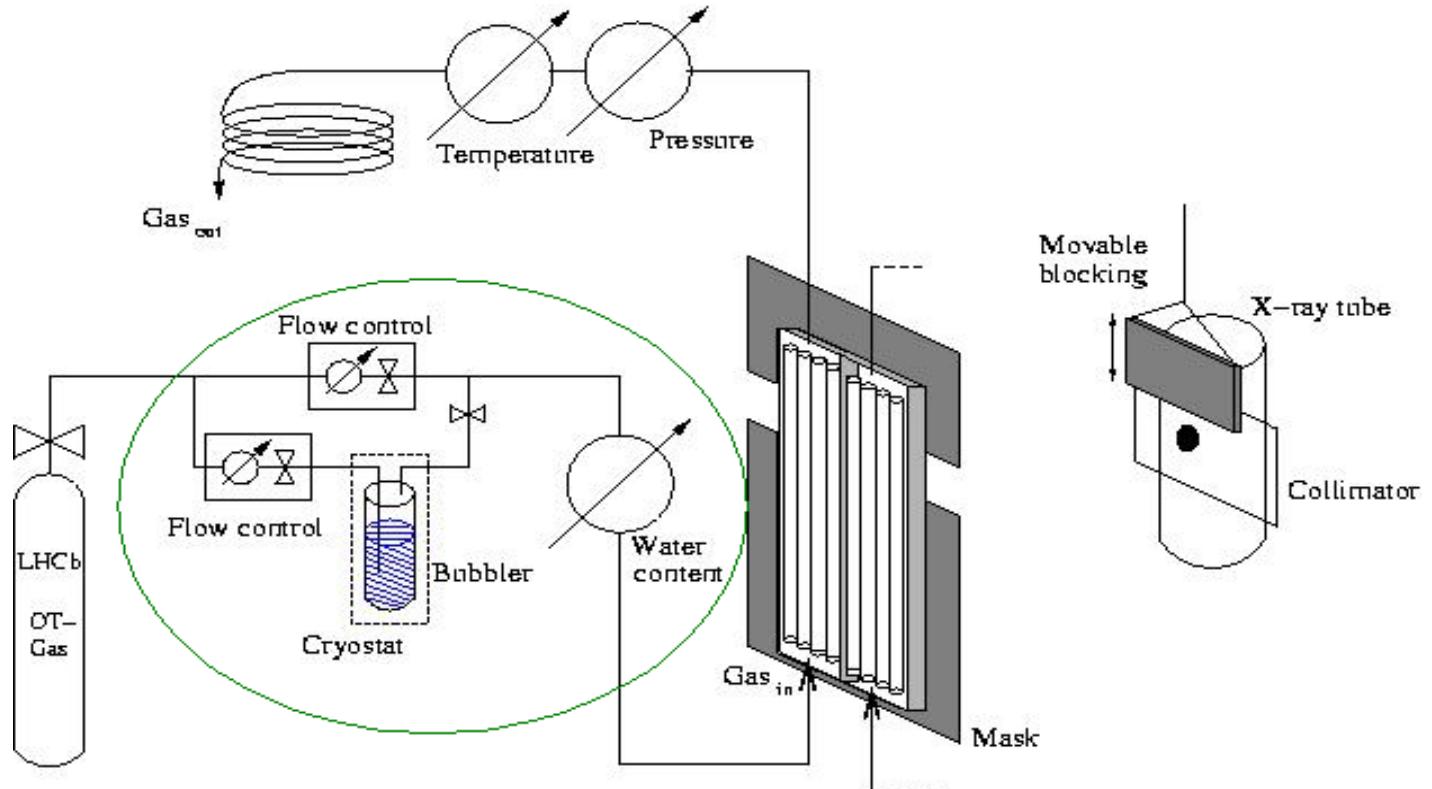

4.11.04

Tanja Haas
Physikalisches Institut

Procedure for ageing tests

Before irradiation:


measure gain along wire

During irradiation:

monitor gain and current of irradiated wire
monitor gain and current of reference wire


After irradiation:

remeasure gain along wire
inspection of wire by means of
optical and electron microscope and
energy dispersive X-ray analysis (EDX)



Operating conditions

Ar/CO₂ Ar/CO₂/CF₄

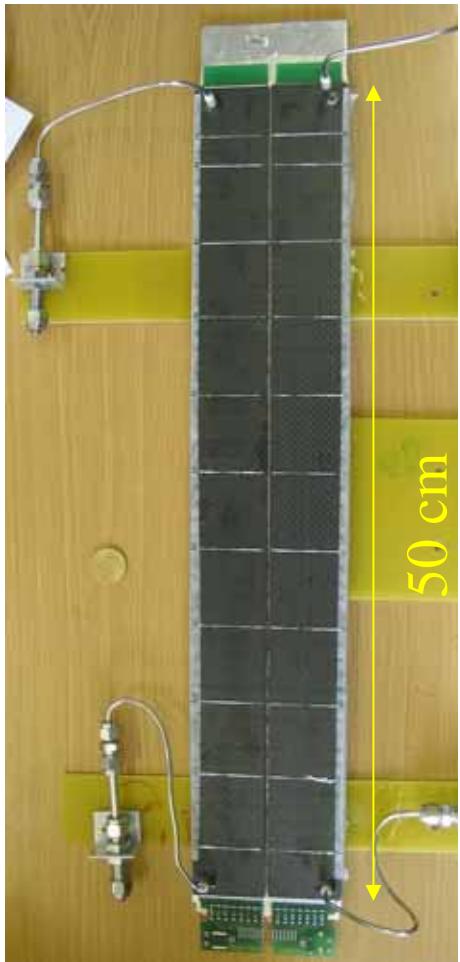

Double chamber:


- test both gases at same time
- final materials

Parameters:

HV: Ar/CO₂ (70/30): 1520V

Ar/CO₂/CF₄ (75/10/15):
1550V

gas gain: 28000 (550 kHz)
40000 (low rate)



4.11.04


Tanja Haas
Physikalisches Institut

24



Results for Ar/CO₂


Optical inspection of wires after 1C/cm

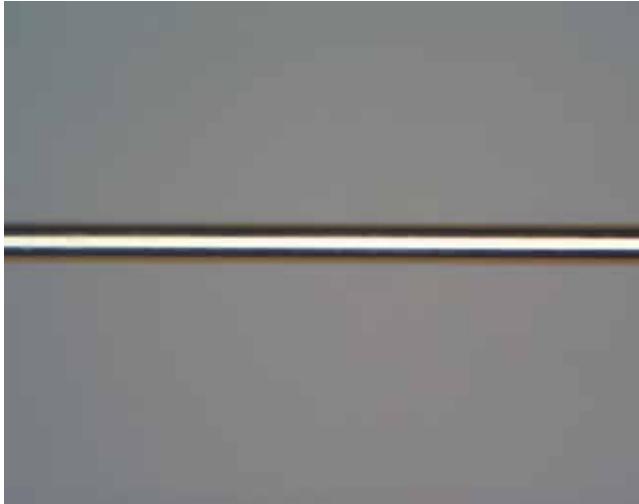

- no gain loss
- no degradation of resolution
- no polymerisation (EDX)



Validation of
system



4.11.04

Tanja Haas
Physikalisches Institut



25



Results for Ar/CO₂/CF₄

Same test conditions as
for Ar/CO₂ mixture:

- wire rupture after 0.6 C/cm !
- gain loss, not restricted to irradiated area
- degradation of resolution
- strong carbon and oxygen deposits
- no Si-pollutions observed

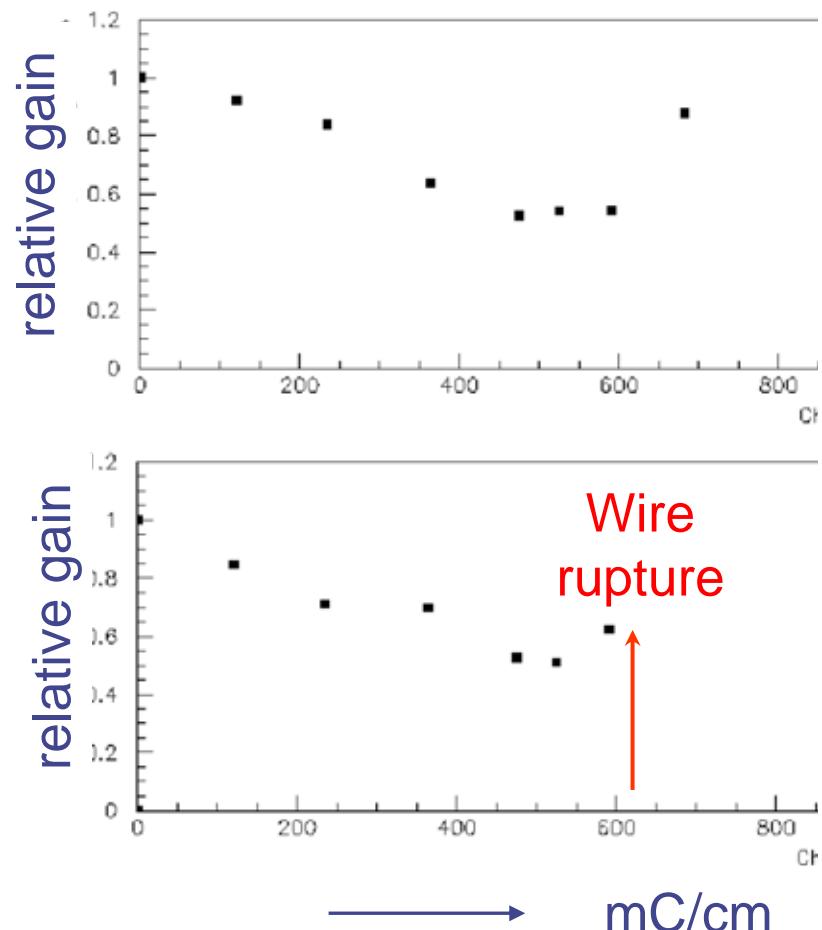


4.11.04

Tanja Haas
Physikalisches Institut

Final choice of counting gas

Ar/CO₂/CF₄ (75/10/15):

Long term operation in a large system risky




abandoned

Ar/CO₂ (70/30):

Slower charge collection, but no major impact on physics performance



baseline gas mixture




Tests with low energetic protons


Aim: Validate cathode, i.e. straw tube materials
Search for unwanted effects

e.g. Malter effect:


CATHODE DEPOSITS INDUCE DISCHARGES:

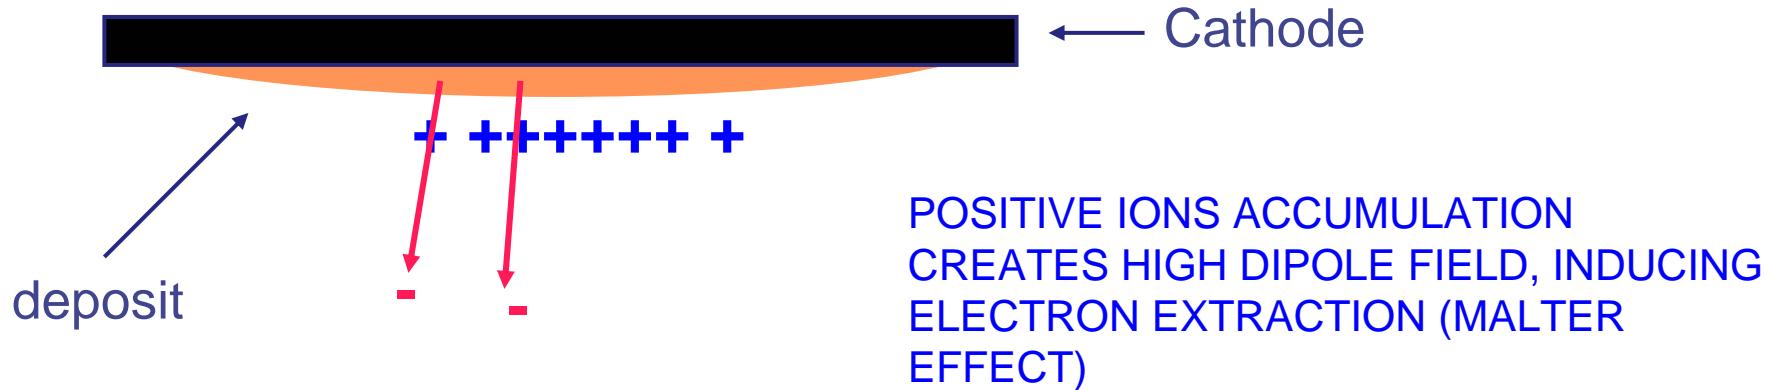

Setup

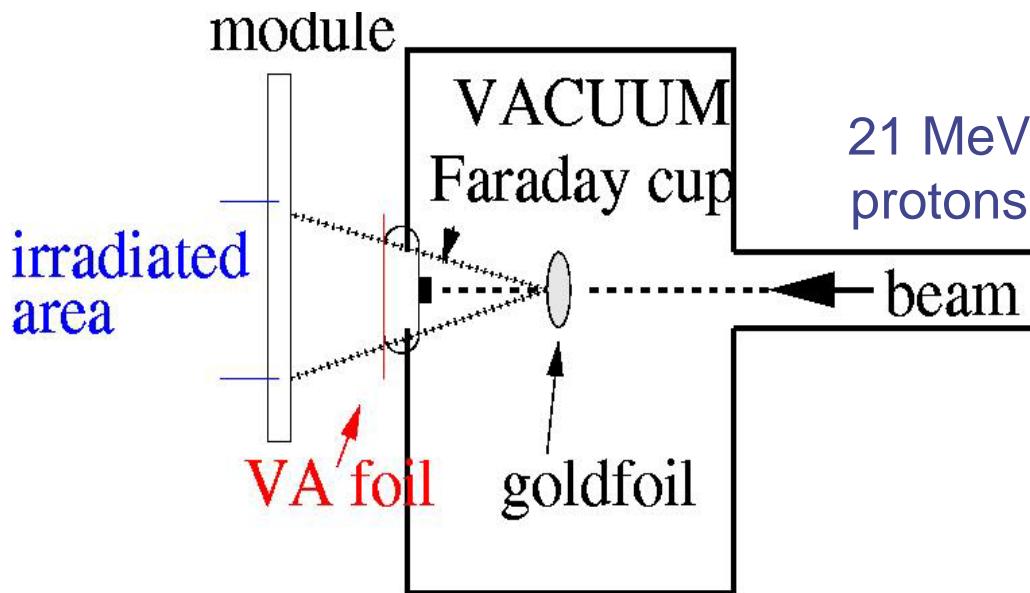

- Rutherford scattering at Au target to reduce current and increase irradiated area
- Faraday cup to absorb the unscattered beam
- Stainless steel (VA) foil to reduce proton energy Bragg peak for highest ionization



4.11.04


Tanja Haas
Physikalisches Institut

29

LHCb
THCP


Primary ionisation of protons

Thickness of VA foil adjusted to Bragg peak
→ maximum primary ionisation

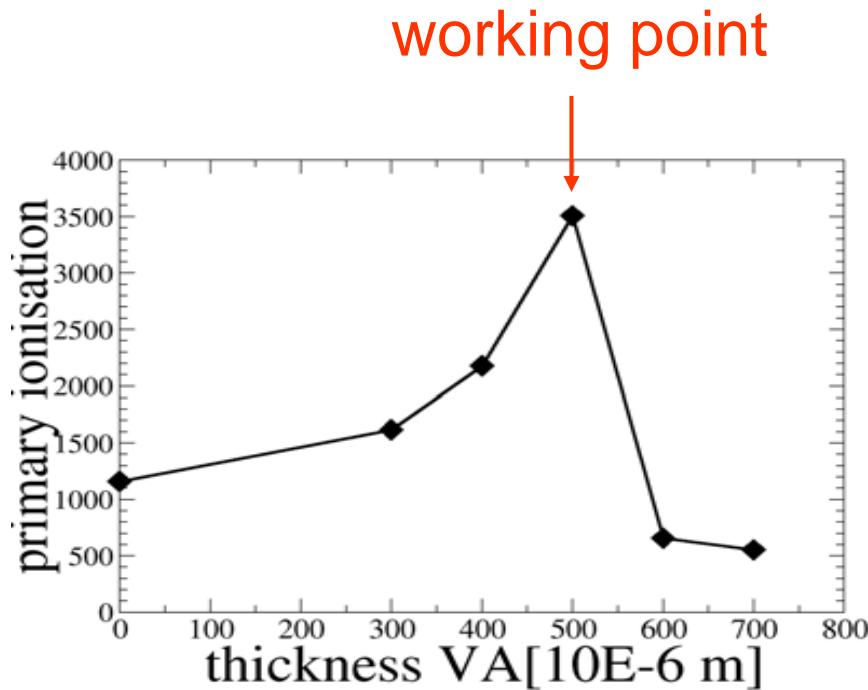


Primary ionisation: up to 1600 MIP's,
average 100 MIP's

Result I

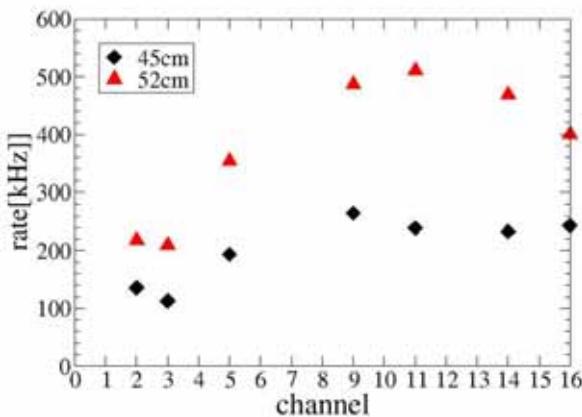

Vertical beam profile

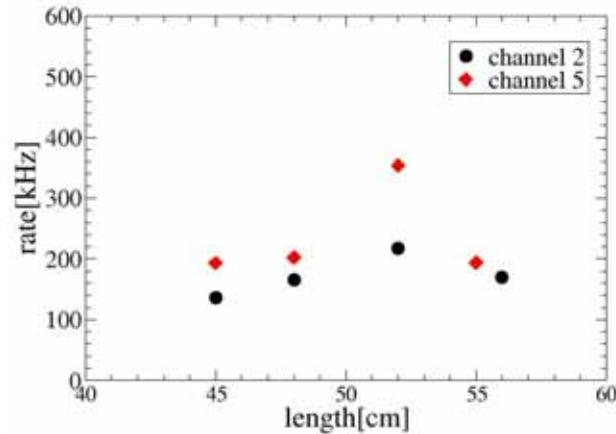


Horizontal beam profile

- 60 hours irradiated
- 9 straws under high voltage
- 1 reference straw
- intensity: 50 – 90 x LHCb intensity
- accumulated charge correspond to 1 – 2 LHCb years

Results II

Stability of gain:

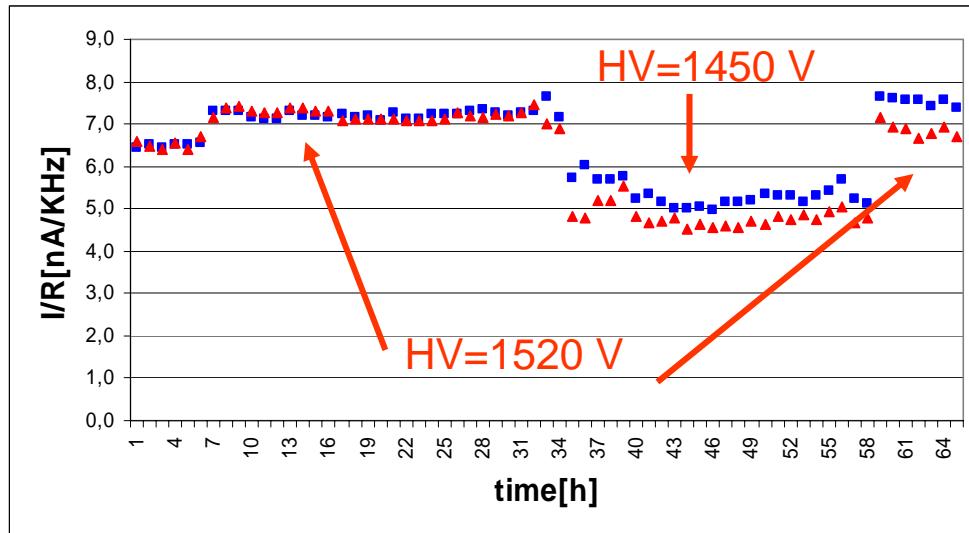

$$I = n q_e R G$$

I: current

n: primary ionisation

R: rate

G: gain


$$\rightarrow I/R \sim G$$

- channel 9
- channel 13 (reference)



- no gain loss (first analysis)
- no Malter effect observed

⇒ Scan with ^{55}Fe
will follow



4.11.04


Tanja Haas
Physikalisches Institut

32

LHCb
THCP

streamer


local gas discharge at high voltage

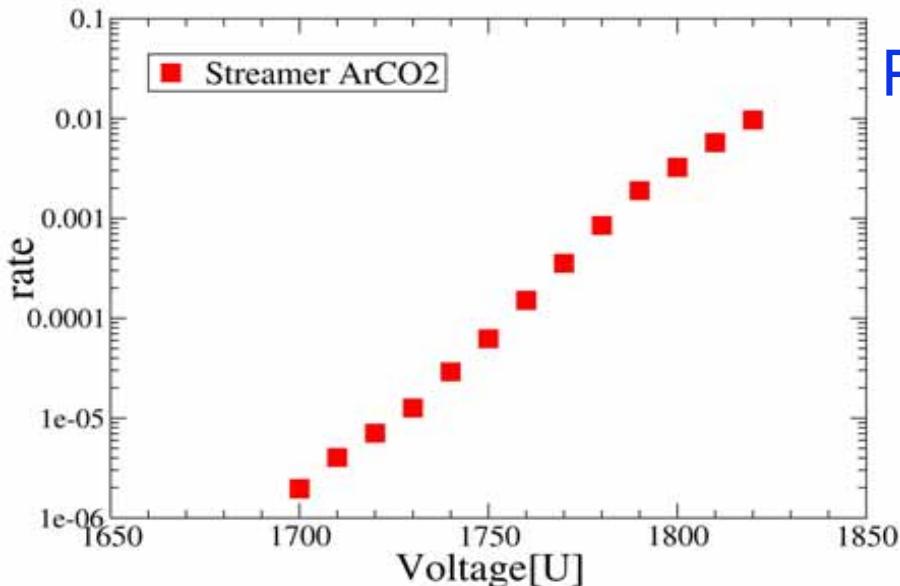

- Problems:
- dead time
 - huge charge
→ ageing!
 - possible damage of electronics

$$\text{rate} = \frac{\text{rate[streamer]}}{\text{rate[signal @ plateau]}}$$

- first Streamer @ 1700 V
- operating point @ 1520 V gain x 16
 - charge deposition @ 1700 V
≈ 1600 MIPs



4.11.04

Summary/Outlook

- mass production started in May
- Detector design has been validated in many aging tests with X-rays and low energetic protons.
- Ar/CO₂ (70/30) chosen as counting gas
- Final tests with detectors build from materials taken out of the production are on the way with
 - lower acceleration factor (~10)
 - larger irradiated area (~50cm)
 - complete LHCb gas system

